

REQUIRED

2-3 Persons



INCLUDED

Table Top



Table Legs X2 Sets



Long Rails X2



Half Moon Fittings
X4




13mm Mini Wrench




Bolts + Washers x8




Hex Key

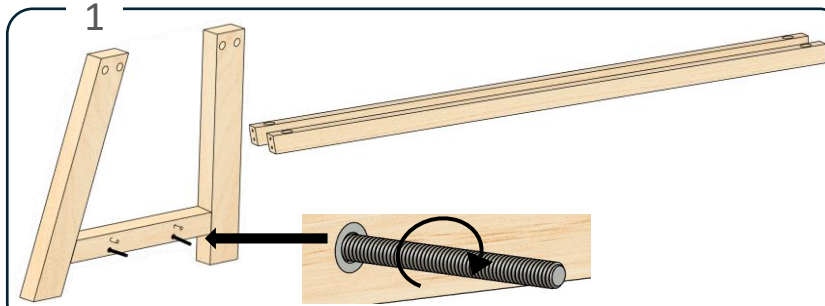


Remove the legs and long rails from packaging. Insert the threaded rod into the pre-installed fitting next to the wood dowel by turning it clockwise by hand.

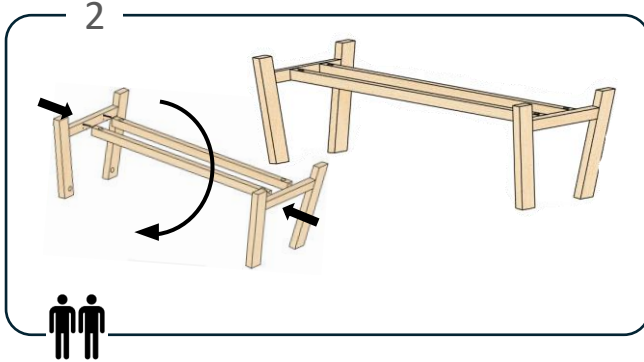


Turn both legs upside down and insert the threaded rods into pre-drilled holes of the long rails. The big holes should be facing upwards to tighten the fitting.

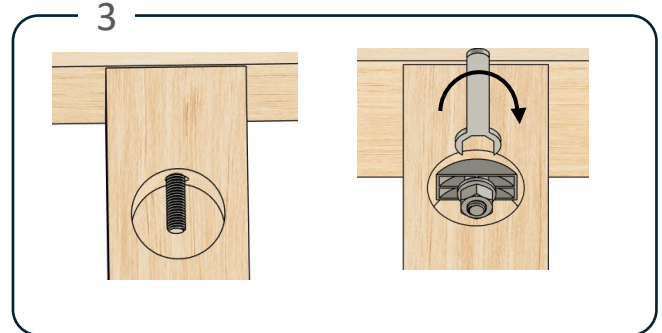

Insert the half moon washer and nut onto the threaded rod visible through the hole at the ends of the rails. Tighten the nut with the mini wrench provided.

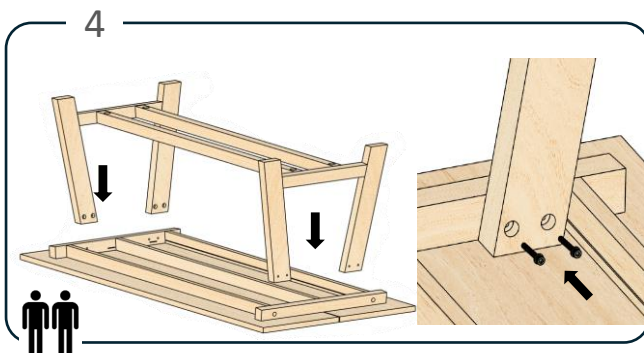

Lower the assembled frame onto the top. The pre-drilled holes of the legs will align with the pre-installed fittings of the top rail.

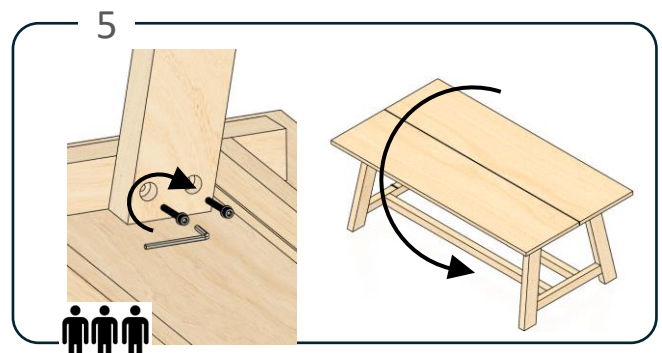

Insert the bolts with washers (2 per leg) and tighten with the provided hex key until secure. Carefully, turn the table upright and ensure that not to rest the table on its side while doing so.