

REQUIRED

2-3 Persons




INCLUDED

Table Top



Table Legs X2



Bolts X1



Washers X5



Allen Key



Half Moon Fittings
X4




13mm Mini Wrench



Wood Dowels X8




1

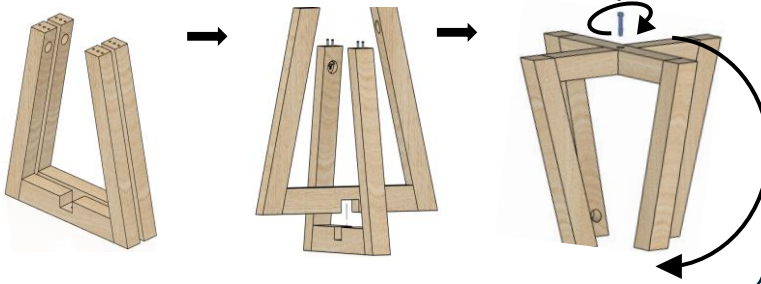


Remove the legs and slide the 2 parts into position where the cut-out joints connect. Turn the legs upside down and tighten the 2 parts using the provided bolt and hex key.

2

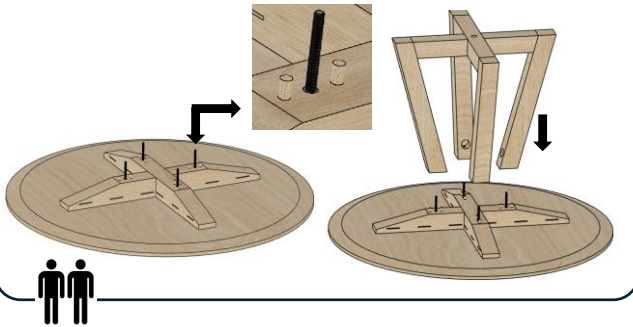


Turn the table top upside down and insert the wood dowels and threaded rods into pre-drilled holes. Lower the legs onto the fittings, which will align with the holes.

3

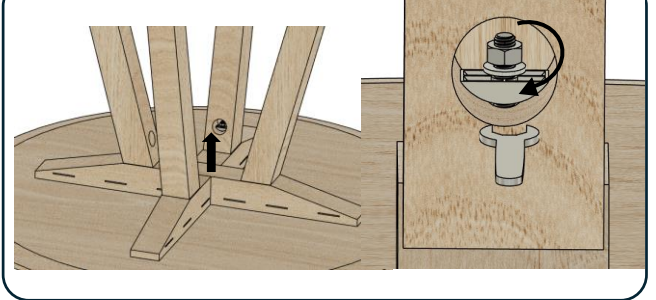


Insert the half moon washer and nut onto the threaded rod visible through the hole at the top of the leg. Tighten the nut with the mini wrench provided.

4

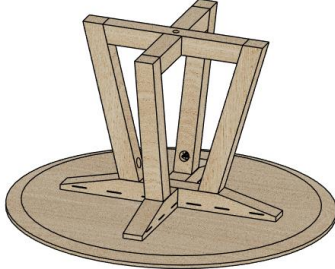

No adjustment needed as legs will fit in place after tightening.

5

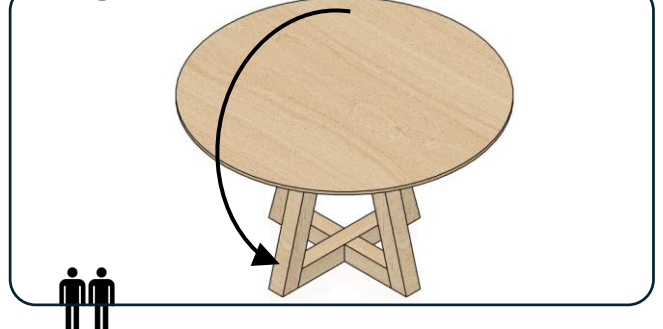

Carefully, turn the table upright and ensure that not to rest the table on its side while doing so.